




D-TOUCH OUTDOOR

DOSTUPNE VE VELIKOSTECH OD 32" AŽ DO 65"

D-TOUCH OUTDOOR 46"

DOSTUPNE TAKÉ VE VELIKOSTECH OD 32" AŽ DO 65"

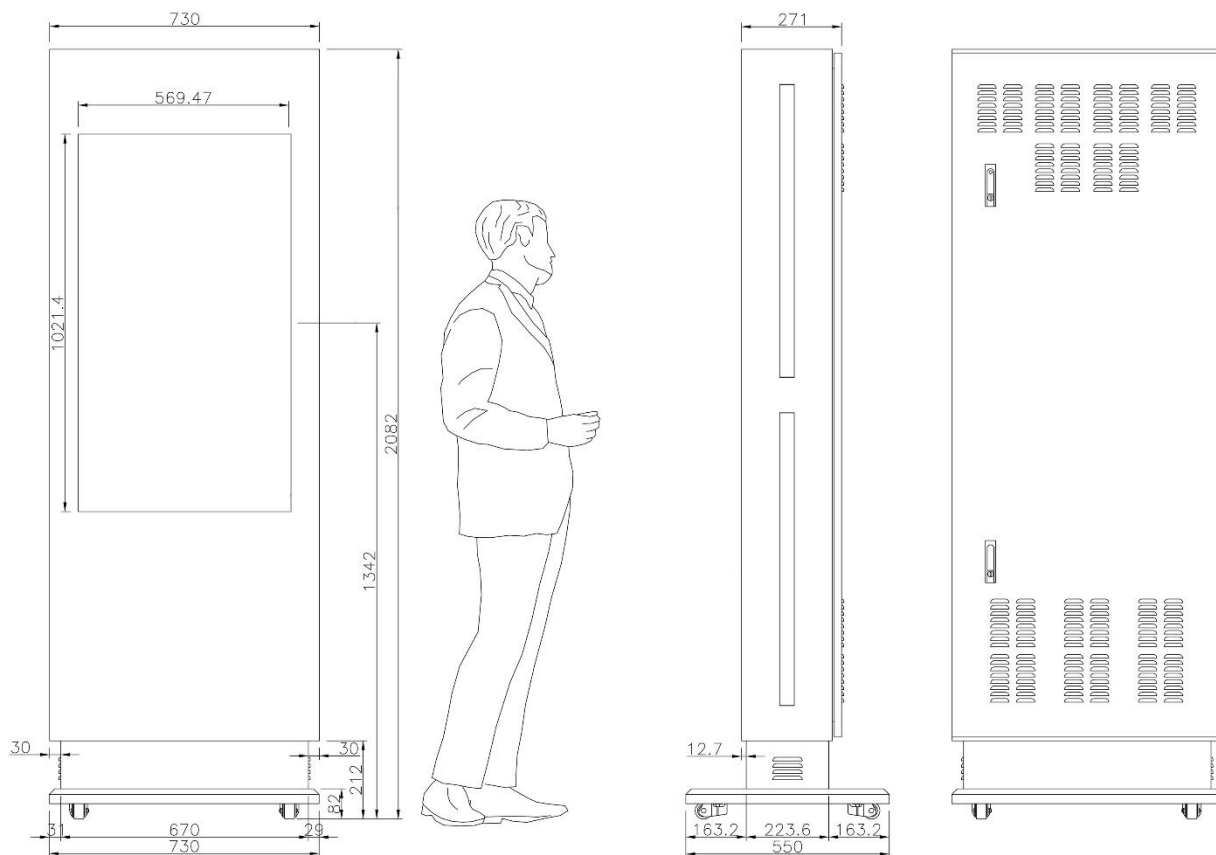

D-TOUCH OUTDOOR 46"

DOSTUPNE TAKÉ VE VELIKOSTECH OD 32" AŽ DO 65"

LCD PANEL

| | |
|---------------------------|--|
| Panel Type | TFT LCD Public DID Panel |
| Panel Manufacturer | Samsung Electronics / LG / AUO |
| Diagonal Size | 46 inches (from 32 to 65 inches) |
| Active Display Area (55") | 1018.08 mm x 572.67 mm |
| Resolution (55") | 1080 x 1920 |
| Pixel Pitch (55", HxV) | 0.53 mm x 0.53 mm |
| Aspect Ratio | 16:9 |
| Display Colours | 8 BIT - 16.7M |
| Luminance | 1500 cd/m ² (from 450 to 2500 cd/m ²) |
| Contrast Ratio | 4000:1 |
| Response Time (G/G) | 8ms |
| Viewing Angle (H/V) | 178/178 |
| Life Time | 50,000 (h) average |

DOTYKOVÁ VRSTVA

| | |
|----------------------------------|--|
| Input Method | Pen, finger or gloved hand activation |
| Touch Activation Force | No minimum touch activation force |
| Position Accuracy | Typical centroid accuracy 2mm |
| Resolution | 8.384 x 4.736 |
| Response time | 10ms |
| Glass | Transmission: 90% Up to 100% / Thickness: 5mm with anti-vandal |
| Optics Number | 179(h) x 100(v) |
| Optics cell pitch | 5.35mm |
| Available Object Sizes for Touch | Touch: Ø7mm / Stylus: Ø8mm |
| Touch Durability | Over 600,000 single point touch |
| Operating Voltage | DC 4.6V ~ DC 5.25V |
| Temperature | Operating -10°C to 65°C / Storage -40°C to 85°C |
| Humidity | Operating 0% to 85% / Storage 0~95% |
| Relative Humidity | Operating 40°C at 90% RH, Noncondensing |
| Interface | USB 2.0 Full Speed (12Mbps) |
| Detection Method | Infrared rays |

D-TOUCH OUTDOOR 46"

DOSTUPNE TAKÉ VE VELIKOSTECH OD 32" AŽ DO 65"

PC

| | |
|--------------|----------------------------------|
| Main Board | ASUS P5G41T-M LX |
| CPU | Intel Core i3-620 |
| RAM | Samsung DDR3 2G x 2 |
| Graphic Card | GeForce GT630 |
| Storage | HDD 1TB / SSD 120GB / USB Memory |

PŘIPOJITELNOST & NAPÁJENÍ

| | |
|-----------------------|-------------------------------|
| Signal input | D-Sub, DVI |
| Internet connectivity | ETHERNET RJ45 / WiFi optional |
| USB | 6 USB ports |
| Power supply | AC100~240V |

CLIMATE CONTROL SYSTEM

| | |
|-------------------|--------------------------|
| Power consumption | 1144W |
| Voltage | 220V 50/60Hz |
| Current | 5.2A |
| Fuse | 10A |
| Refrigerant | R-134A |
| Capacity | 450/500Kcal/h (2.000BTU) |
| Compressor | 0.15kW (1/5HP) |
| Weight | 27Kg |
| Dimension | 350x549x180mm |
| IP | IP54 |

DALŠÍ MOŽNOSTI KONFIGURACE

| | |
|---|--------------------------------------|
| Dotykový rámeček / Pasivní obrazovka (nedotykový) | Ano / Ano |
| Singleside / Doubleside provedení | Ano / Ano |
| Indoor / Outdoor využití | Ano / Ano |
| Pevná montáž do podlahy / na kolečkách | Ano / Ano |
| Vaše logo na přístroji: nálepka / pískování předního panelu | Ano / Ano |
| Servisní dvířka na klíč k PC / k monitoru | Ano / Ano |
| Barva přístroje | Libovolná (dle RAL / PANTONE / CMYK) |